


MINI DROP AMPLIFIER PASSIVE RETURN

[M-AMP-1-x-x/x-x] Cable Products, Drop Amplifiers

Features

- 5–1002 MHz Bandwidth
- 360° Pin Structure / Push / Pull Force ≥ 100 g
- LED Power Indicator, Power Adapter Included
- Zinc Alloy Housing, RFI > 100 dB
- IEEE C62.41-1991 100 KHz Ring Wave
- Category A3 6 kV Surge Withstand
- Compact Design for Limited Installation Space
- Active Forward (Downstream) with Passive Return (Upstream)

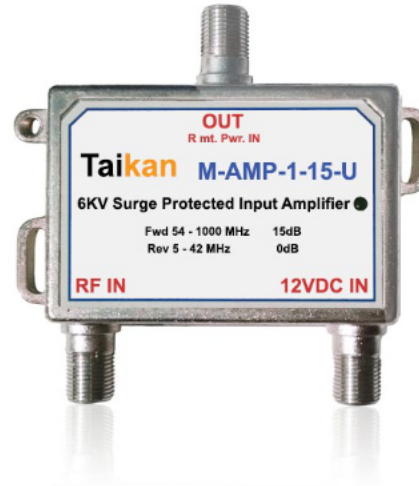

Ordering Information

M-AMP - 1 - x - x/x - x

U: US Power Adapter 110V; E: Europe Power Adapter 220V

42/54 (5-42 / 54-1002); 65/85 (5-65 / 85-1002); 55/70 (5-55 / 70-1002); 85/105 (5-85 / 105-1002)

10 or 15 dB Forward Gain

Model Number	Standard Carton	Dimensions	Carton Weight
M-AMP-1-x-x/x-x	50 pcs	30.5 x 55.9 x 28 cm / 12 x 22 x 11 in.	14 kg / 31 lbs

Forward Specifications

	M-AMP-1-10-x/x-x	M-AMP-1-15-x/x-x	Units
Forward Path Frequency	(54/70/85/105)-1002	(54/70/85/105)-1002	MHz
Typical Gain	10	15	dB
Output Level	20	25	dBmV
Return Loss	15	15	dB
Flatness	± 1.0	± 1.0	dB
Noise Figure	4.0	4.0	dB
CTB*	-73	-73	dBc
CSO*	-62	-62	dBc

Return Specifications

	5-(42/55/65/85)	5-(42/55/65/85)	Units
Return Path Frequency	5-(42/55/65/85)	5-(42/55/65/85)	MHz
Insertion Loss	1.0	1.0	dB
Typical Gain	0	0	dB
Return Loss	15	15	dB
Max Output Level	N/A	N/A	dBmV
Response Flatness	± 1.0	± 1.0	dB
Noise Figure	N/A	N/A	dB

* 77 analog channels (54 to 552 MHz) at 10 dBmV/ch. + 33 digital channels (552 to 750 MHz). All channels flat

© Copyright 2020 Taikan Company Inc. All rights reserved. This document is for information only. Features and specifications are subject to change without notice. v060920