


Features

- 5-1002 MHz with 5-42 MHz active return path
- Voip Port for digital phone connection. No amplification.
- Non interrupted signal even in event of power outages to be used with battery back-up MTA for maintaining E911 connection.
- Aluminum Alloy housing
- “F” ports waterproofed to withstand 1 kg/cm² air pressure
- RF input: IEEE C62.41-1991 3kA combo wave, Category B3 6kV surge withstand
- RF outputs: IEEE C62.41-1991 100kHz ring wave, Category A3 6kV surge withstand
- Available 4 port model

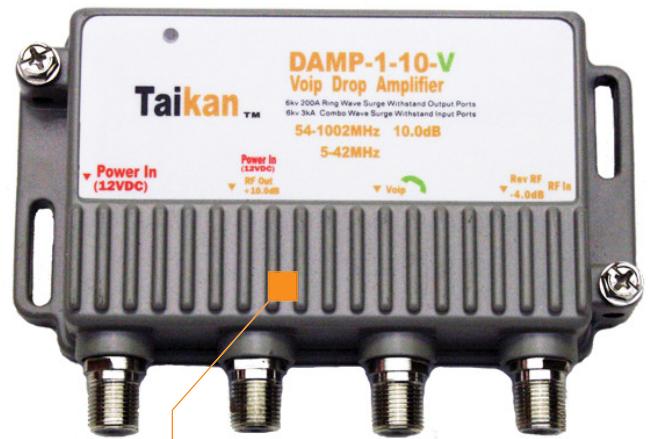

Ordering Information

DAMP-1-10-V-**x**

U: Includes US Power adaptor
 E: Includes European power adaptor

Forward Frequency	54-1002	MHz
Typical Forward Gain	10	dB
Voip (Digital Phone)	-4	dB
Return Frequency	5-42	MHz
Typical Return Gain	0	dB
Response Flatness	1	dB
Number of Output Ports	1	-
Return Loss	-18	dB
Rated Output Level	25	dBmV
Composite Triple Beat	-74	dBc
Composite Second Order	-70	dBc
Noise Figure	3	dB
Hum Modulation	-70	dB
Power Consumption	12 VDC / 110 V	

Standard Carton	20 pcs
Dimensions	12 x 5 x 11 cm / 4.7 x 2 x 4.3 in
Box Weight	9 kgs / 20 lbs

*Input levels at +13.5 dBmV/Ch 79 analog channels (54-552 MHz) plus digital channels (552-750 MHz) at -6 dBc.