

POLE MOUNT POWER SUPPLY [PSP-xxW-xx-x]

Cable Products, Power Supplies

Description

The Taikan PSP Series Non-Standby Power Supply Units provide conditioned power to signal amplifiers in CATV and broadband distribution systems. Designed in a durable anodized aluminum housing (powder coating available) with a high quality ferroresonant transformer.

Taikan's Non-Standby Power Supplies have an efficiency rating of 90% or better, and are consistently reliable in terms of trouble-free maintenance and operation.


PSP Series utilize the ferroresonant transformer technology to provide line conditioning and voltage regulation (output - quasi square wave form).

The ferroresonant transformer design supplies the load with current-limited, regulated voltage free from spikes, surges and other forms of power line transients.

Features

- Used for CATV / Broadband Networks Requiring an Efficient, Non-Standby Power Supply; Ideally Suited for Pole Mounting Use
- Ferroresonant Design Provides Fully Regulated Output Voltage in a Quasi-Square Wave Form
- Overload Surge and Short Circuit Protection (Auto Reset Function) and Current Limiting Capability
- Auto Stable Function - Input Voltage Variation +/- 20% and Output Voltage Regulation +/- 3%. Other Input / Output Variability Available
- Housing Designed with AL 5052 Anodized Aluminum Material with Powder Coating (Available Option) for Durability and Corrosion Resistance
- Safety and Protection Features Based on Industry Standards
- Additional Features Include an External Lock and Internal Power Switch
- Time Delay Module Option
- CE Certified
- **Additional Specifications Available Upon Request**

Ordering Information

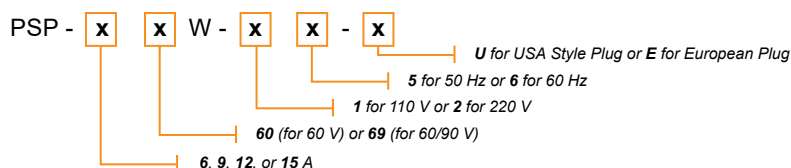

Model Number	Standard Carton	Carton Dimensions	Carton Weight
PSP-660W-xx-x	1 pc	445 x 298 x 245 mm. (17.5 x 11.7 x 9.6 in.)	16 kg (35.2 lbs)
PSP-960W-xx-x	1 pc	445 x 298 x 245 mm. (17.5 x 11.7 x 9.6 in.)	18 kg (39.6 lbs)
PSP-1260W-xx-x	1 pc	445 x 298 x 245 mm. (17.5 x 11.7 x 9.6 in.)	21 kg (46 lbs)
PSP-156xW-xx-x	1 pc	445 x 298 x 245 mm. (17.5 x 11.7 x 9.6 in.)	22 kg (48.5 lbs)

Features	PSP-660W-xx-x	PSP-960W-xx-x	PSP-1260W-xx-x	PSP-1560W-xx-x	PSP-1569W-xx-x
Output Power	360 W	540 W	720 W	900 W	900 W
Output Current	6 A	9 A	12 A	15 A	15 A / 10 A
Output Voltage	60 V				60 V / 90 V
Output Waveform	Quasi-Square Wave				
Input Power Supply	110 V ± 20% or (220 V ± 20%)				
Input Frequency	50 or 60 Hz (± 3%)				
Input Power Factor	0.90 at Full Load				
Protection	Short Circuit Protection // Overload Current Limit // Start-up Output Delay // Output Surge Protection				
Operating Temperature	-40 °C ~ 55 °C (-40 °F ~ 131 °F)				
Warranty	2 years				

STRAND MOUNT POWER SUPPLY [PSS-xxW-xx-x]

Cable Products, Power Supplies

Taikan
ESTD. 1973


Description

The Taikan PSS Series Non-Standby Power Supply Units provide conditioned power to signal amplifiers in CATV and broadband distribution systems. Designed in a durable ADC 12 aluminum alloy housing with a high quality ferroresonant transformer.

Taikan's Non-Standby Power Supplies have an efficiency rating of 90% or better, and are consistently reliable in terms of trouble-free maintenance and operation.

PSS Series utilize the ferroresonant transformer technology to provide line conditioning and voltage regulation (output - quasi square wave form).


The ferroresonant transformer design supplies the load with current-limited, regulated voltage free from spikes, surges and other forms of power line transients.

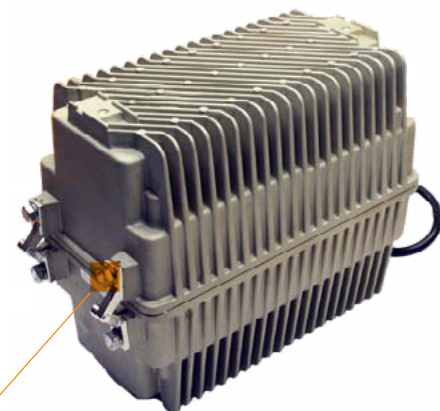

Features

- Used for CATV / Broadband Networks Requiring an Efficient, Non-standby Power Supply; Ideally Suited for Strand Mounting Use
- Ferroresonant Design Provides Fully Regulated Output Voltage in a Quasi-Square Wave Form
- Overload Surge and Short Circuit Protection (Auto Reset Function) and Current Limiting Capability
- Housing Designed with ADC 12 Aluminum Alloy Material
- Auto Stable Function - Input Voltage Variation +/- 20% and Output Voltage Regulation +/- 3%. Other Input / Output Variability Available
- Housing Designed with ADC 12 Aluminum Alloy Material
- Safety and Protection Features Based on Industry Standards
- Time Delay Module Option
- CE Certified
- **Additional Specifications Available Upon Request**

Ordering Information

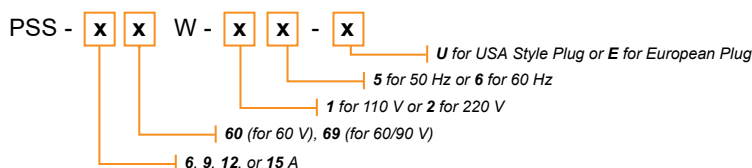

Model Number	Standard Carton	Dimensions			Carton Weight
PSS-660W-xx-x	1 pc	445 x 298 x 245 mm / 17.5 x 11.7 x 9.6 in.			15 kg / 33 lbs
PSS-960W-xx-x	1 pc	445 x 298 x 245 mm / 17.5 x 11.7 x 9.6 in.			17 kg / 37.5 lbs
PSS-1260W-xx-x	1 pc	445 x 298 x 245 mm / 17.5 x 11.7 x 9.6 in.			20 kg / 44 lbs
PSS-156xW-xx-x	1 pc	445 x 298 x 245 mm / 17.5 x 11.7 x 9.6 in.			21 kg / 46 lbs
Features	PSS-660W-xx-x	PSS-960W-xx-x	PSS-1260W-xx-x	PSS-1560W-xx-x	PSS-1569W-xx-x
Output Power	360 W	540 W	720 W	900 W	900 W
Output Current	6 A	9 A	12 A	15 A	15 A / 10 A
Output Voltage	60 V				60 V / 90 V
Output Waveform	Quasi-Square Wave				
Input Power Supply	110 V ± 20% or (220 V ± 20%)				
Input Frequency	50 / 60 Hz				
Protection	Short Circuit Protection // Overload Current Limit // Start-up Output Delay // Output Surge Protection				
Operating Temperature	-40 °C ~ 55 °C (-40 °F ~ 131 °F)				