

SPLICE CONNECTOR [MLC-xS-3-x]

Cable Products, Hardline Connectors

Taikan

Features

- Cable to Cable Splice
- 500, 540, or 750 Type
- 3 Piece Design
- P1, P3, or QR Cable Type
- Standard Quantity: 10 pcs




Ordering Information

MLC - **x** S - 3 - **x**



P1, (500 Pin Type Only) P3 or QR (540 Pin Type Only)

500, 540, or 750 Pin Type

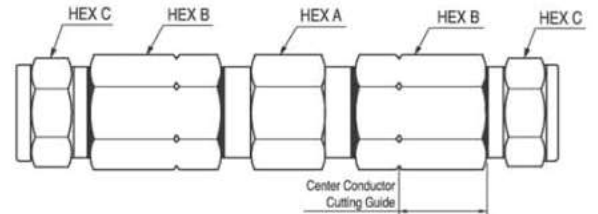

3 Piece Splice Connector

MLC-500S-3-P1	.500 Splice Connector, 3 Piece, P1 Cable
MLC-500S-3-P3	.500 Splice Connector, 3 Piece, P3 Cable
MLC-540S-3-QR	.540 Splice Connector, 3 Piece, QR Cable
MLC-750S-3-P3	.750 Splice Connector, 3 Piece, P3 Cable

Specifications

Bandwidth	5-1000 MHz
Nominal Impedance	75 Ω
Shielding Effectiveness	120 dB
Return Loss	≥ 25 dB
Insertion Loss	≤ 0.15 dB
Working Temperature	-40 °C ~60 °C