

88 SERIES 1.0 GHz OUTDOOR TAPS [DT88G-SR-CB-x-x-x]

Cable Products

Description


Taikan's 88 series taps have been designed with the future of the CATV industry in mind. All units come complete with a factory installed power passing bar for uninterrupted service when the faceplate is removed. Interchangeable faceplates allow for future network growth while minimizing costly equipment upgrades for cable providers. All taps are backed by Taikan's one year limited warranty. *

Features

- 5-1002 MHz Bandwidth (1.2 GHz option also available)
- 12 A Current Capacity
- Aluminum Alloy Housing used for Corrosion Resistance
- Neoprene Weather Gasket and RFI Shielding at 120 dB
- Blocking Capacitors on the "F" Ports for Extended Surge Resistance
- Epoxy Sealed and Nickel Plated Brass "F" Ports
- Operational Temperature Range -40°C to +60°C (-40°F to +140°F)
- Printed Circuit Board
- Power Passing Option: CB: Continuous Through Signal w/o Faceplate
- Easily Interchangeable 2/4/8 Port Faceplates
- Double Polyurethane Coating for Greater Weather Protection
- Compliant with SCTE Guidelines
- Standard jumper installed
- Aerial or Pedestal Installation
- SCA Equalizable Tap Options Available
- Options: SCA-EQ-xx, SCA-CS-xx, SCA-RPA-xx, SCA-FPA-xx, SCA-HPF-54
- Surge Withstand: IEEE C62.41-1991 Category B3/6kV Combination Wave, 3000 A



Ordering Information

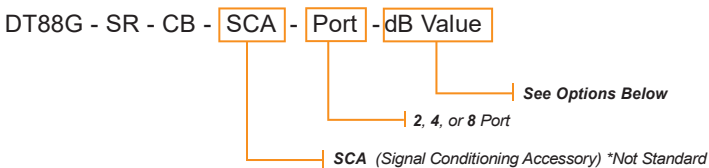

Model Number	Inner Box	Standard Carton	Carton Weight	dB Values Available
DT88G-SR-CB-x-2xx	10 pcs	40 pcs	17 kg / 37 lbs	-04T, -08, -11, -14, -17, -20, -23, -26, -29, -32, -35
DT88G-SR-CB-x-4xx	10 pcs	40 pcs	18 kg / 40 lbs	-08T, -11, -14, -17, -20, -23, -26, -29, -32, -35
DT88G-SR-CB-x-8xx	10 pcs	40 pcs	21 kg / 45 lbs	-11T, -14, -17, -20, -23, -26, -29, -32, -35

* Please refer to <http://www.taikan.com/Downloads/warranty.pdf> for our warranty service agreement
 © Copyright 2020 Taikan Company Inc. All rights reserved. This document is for information only. Features and specifications are subject to change without notice. v01172023



2 Port Specifications - 1.0 GHz

Customization available upon request

Insertion Loss (dB)

Frequency	4T	8		11		14		17		20		23		26		29		32	
		Max	Typ	Max	Typ	Max	Typ	Max	Typ	Max	Typ	Max	Typ	Max	Typ	Max	Typ	Max	Typ
5-42 MHz	T	3.4	3.1	1.8	1.2	1.0	0.8	0.9	0.7	0.8	0.5	0.8	0.4	0.8	0.4	0.8	0.4	0.8	0.4
42-400 MHz	T	3.6	3.5	2.0	1.8	1.3	1.2	1.0	0.9	1.0	0.9	1.0	0.8	1.0	0.8	1.0	0.8	1.0	0.8
400-750 MHz	T	4.5	4.2	2.4	2.2	1.5	1.5	1.4	1.1	1.2	1.0	1.2	1.0	1.2	1.0	1.2	1.0	1.2	1.0
750-1002 MHz	T	4.8	4.5	3.3	3.0	2.6	1.7	2.0	1.5	2.0	1.4	1.8	1.3	1.8	1.3	1.8	1.3	1.8	1.3

Tap Value (dB) Tolerance: ± 1.0

Frequency	4T	8	11	14	17	20	23	26	29	32
5-600 MHz	4	8	11	14	17	20	23	26	29	32
600-800 MHz	4	8	11	14	17	20	23	26	29	32
800-1002 MHz	4	8	11	14	17	20	23	26	29	32

Tap to Tap Isolation (dB)

Frequency	4T	8	11	14	17	20	23	26	29	32
5-15 MHz	22	22	22	22	22	22	22	22	22	22
15-42 MHz	25	25	25	25	25	25	25	25	25	25
42-600 MHz	25	25	25	25	25	25	25	25	25	25
600-1002 MHz	22	22	22	22	22	22	22	22	22	22

Output to Tap Isolation (dB)

Frequency	4T	8	11	14	17	20	23	26	29	32
5-15 MHz	T	22	22	24	27	30	35	38	40	44
15-400 MHz	T	23	26	30	30	34	36	38	42	45
400-750 MHz	T	22	22	22	28	30	32	32	32	32
750-1002 MHz	T	22	22	22	28	30	32	32	32	32

Input / Output / Tap Return Loss (dB)

Frequency	4T	8	11	14	17	20	23	26	29	32
5-15 MHz	16	16	16	16	16	16	16	16	16	16
15-42 MHz	18	18	18	18	18	18	18	18	18	18
42-400 MHz	18	18	18	18	18	18	18	18	18	18
400-1002 MHz	16	16	16	16	16	16	16	16	16	16

Hum Modulation @ 10 A (dB)

5-1002 MHz	-60	-60	-60	-60	-60	-60	-60	-60	-60	-60
------------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

General Specifications: Power Passing 12 A, 60/90 VAC

4 Port Specifications - 1.0 GHz

Customization available upon request

Insertion Loss (dB)

Frequency	8T	11		14		17		20		23		26		29		32		35	
		Max	Typ	Max	Typ	Max	Typ	Max	Typ	Max	Typ	Max	Typ	Max	Typ	Max	Typ	Max	Typ
5-42 MHz	T	3.2	3.2	1.8	1.6	1.0	0.9	1.0	0.7	1.0	0.4	0.8	0.4	0.8	0.4	0.8	0.4	0.8	0.4
42-400 MHz	T	3.5	3.4	2.0	1.8	1.3	1.2	1.0	0.9	1.0	0.8	1.0	0.8	1.0	0.8	1.0	0.8	1.0	0.8
400-750 MHz	T	4.5	4.2	2.4	2.2	1.5	1.3	1.4	1.2	1.2	1.0	1.2	1.0	1.2	1.0	1.2	1.0	1.2	1.0
750-1002 MHz	T	4.8	4.5	3.5	3.0	2.6	1.7	2.0	1.6	1.8	1.4	1.8	1.3	1.8	1.3	1.8	1.3	1.8	1.3

Tap Value (dB) Tolerance: ± 1.0

Frequency	8T	11	14	17	20	23	26	29	32	35
5-600 MHz	8	11	14	17	20	23	26	29	32	35
600-800 MHz	8	11	14	17	20	23	26	29	32	35
800-1002 MHz	8	11	14	17	20	23	26	29	32	35

Tap to Tap Isolation (dB)

Frequency	8T	11	14	17	20	23	26	29	32	35
5-15 MHz	22	22	22	22	22	22	22	22	22	22
15-42 MHz	25	25	25	25	25	25	25	25	25	25
42-600 MHz	25	25	25	25	25	25	25	25	25	25
600-1002 MHz	22	22	22	22	22	22	22	22	22	22

Output to Tap Isolation (dB)

Frequency	8T	11	14	17	20	23	26	29	32	35
5-15 MHz	T	22	22	22	27	35	38	40	42	44
15-400 MHz	T	25	27	30	33	33	34	42	44	45
400-750 MHz	T	24	25	28	30	30	30	39	41	43
750-1002 MHz	T	22	23	24	25	24	25	27	31	32

Input / Output / Tap Return Loss (dB)

Frequency	8T	11	14	17	20	23	26	29	32	35
5-15 MHz	16	16	16	16	16	16	16	16	16	16
15-42 MHz	18	18	18	18	18	18	18	18	18	18
42-400 MHz	18	18	18	18	18	18	18	18	18	18
400-1002 MHz	16	16	16	16	16	16	16	16	16	16

Hum Modulation @ 10 A (dB)

5-1002 MHz	-60	-60	-60	-60	-60	-60	-60	-60	-60	-60
------------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

General Specifications: Power Passing 12 A, 60/90 VAC

8 Port Specifications - 1.0 GHz

Customization available upon request

Insertion Loss (dB)

Frequency	11T	14		17		20		23		26		29		32		35	
		Max	Typ	Max	Typ	Max	Typ	Max	Typ	Max	Typ	Max	Typ	Max	Typ	Max	Typ
5-42 MHz	T	3.2	3.2	1.8	1.6	1.1	0.9	1.0	0.9	1.0	0.4	0.8	0.4	0.8	0.4	0.8	0.4
42-400 MHz	T	3.5	3.4	2.0	1.8	1.3	1.2	1.3	0.9	1.0	0.8	1.0	0.8	1.0	0.8	1.0	0.8
400-750 MHz	T	4.5	4.2	2.4	2.2	1.5	1.3	1.5	1.1	1.2	1.0	1.2	1.0	1.2	1.0	1.2	1.0
750-1002 MHz	T	4.8	4.5	3.5	3.0	2.2	2.0	2.2	1.6	1.8	1.4	1.8	1.3	1.8	1.3	1.8	1.3

Tap Value (dB) Tolerance: ± 1.0

Frequency	11T	14	17	20	23	26	29	32	35
5-600 MHz	11	14	17	20	23	26	29	32	35
600-800 MHz	11	14	17	20	23	26	29	32	35
800-1002 MHz	11	14	17	20	23	26	29	32	35

Tap to Tap Isolation (dB)

Frequency	11T	14	17	20	23	26	29	32	35
5-15 MHz	22	22	22	22	22	22	22	22	22
15-42 MHz	25	25	25	25	25	25	25	25	25
42-600 MHz	25	25	25	25	25	25	25	25	25
600-1002 MHz	22	22	22	22	22	22	22	22	22

Output to Tap Isolation (dB)

Frequency	11T	14	17	20	23	26	29	32	35
5-15 MHz	T	22	22	26	31	35	38	40	42
15-400 MHz	T	28	28	30	33	34	35	42	44
400-750 MHz	T	25	25	25	28	28	30	32	32
750-1002 MHz	T	23	23	25	28	28	28	31	32

Input / Output / Tap Return Loss (dB)

Frequency	11T	14	17	20	23	26	29	32	35
5-15 MHz	16	16	16	16	16	16	16	16	16
15-42 MHz	18	18	18	18	18	18	18	18	18
42-400 MHz	18	18	18	18	18	18	18	18	18
400-1002 MHz	16	16	16	16	16	16	16	16	16

Hum Modulation @ 10 Amp (dB)

5-1002 MHz	-60	-60	-60	-60	-60	-60	-60	-60	-60
------------	-----	-----	-----	-----	-----	-----	-----	-----	-----

General Specifications: Power Passing 12 A, 60/90 VAC